




Traugott

Schmutzfang : Funktionsbeläge : Objektbeläge



mountain railway/municipal

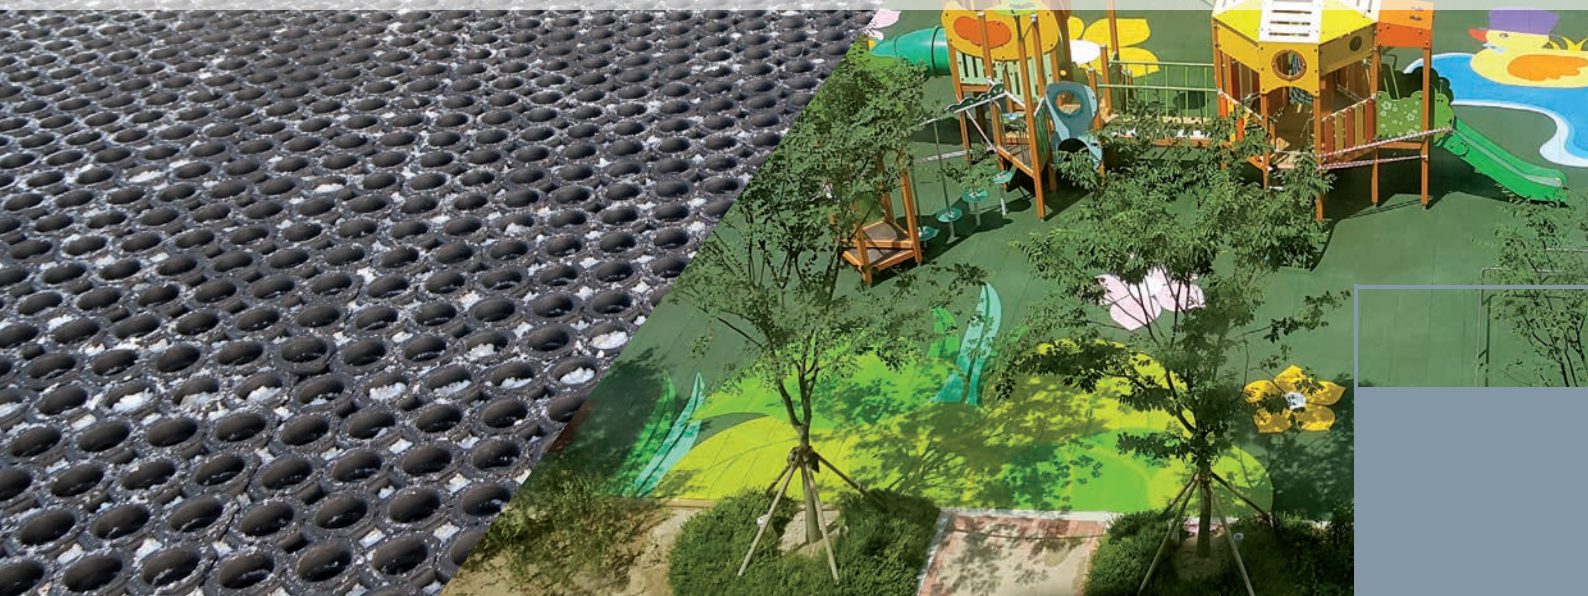



company presentation

Georg Traugott GmbH is a wholesaler and producer of dirt control and functional coverings in Innsbruck. We have been in the rubber honeycomb mat business for many years and are now the market leader in Austria.

Since 2002, the use of smoke and fire protection certified coverings in cable cars and at all access points has been required by law in Austria.

At that time, we worked as experts on the draft legislation and were also the first supplier of certified rubber honeycomb mats.

We are constantly developing the products further in order to be able to optimally respond to the wishes and problems of our customers. That's why we work on improvements for our products every year in our production facility.

Since 2012, the Georg Traugott GmbH range has also included cut-resistant rubber honeycomb mats with fire protection certification, which have already proven themselves.

IMPORTANT!

A container of rubber honeycomb mats has a lead time of over 3 months!

In order to be able to guarantee a timely delivery time for the start of the season, we would ask you to let us know your (approximate) requirements and the desired delivery week as soon as possible.

Tips for your requirements planning:

1. „First come, first serve!“
Reserve your mats on time and let us know your desired delivery date.
2. A successful winter season is planned in summer - order your rubber mats in summer.
3. An approximate amount is better than none!
4. uncomplicated: reserve - order - receive - pay

Honeycomb rubber mats

Plon 2	7
Lech	8 - 9
Pitz	10 - 12
Delivery table & accessoires	13



Kraiburg Sportec sport flooring

SPORTEC® mountain	16
SPORTEC® neon	17
SPORTEC® style/edge- & corner ramps	18 - 19
SPORTEC® color/purcolor	20 - 21
SPORTEC® variant	22
SPORTEC® UNI classic/UNI versa/UNI versa sandwich	23 - 25




Euroflex fall protection, playground

Soft Grip/Soft Touch	28 - 29
Fall protection	30 - 32
Visual System	33
Sports pavement slabs, Elastic pavement blocks, Paving block tile	34 - 35
Playground accessoires	37 - 39



Tirolsport

Giant Performance	42
Giant Fitness/Max	43




Special coverings

Flotex	46
Safestep, Colorex	47 - 48
Fine groove/checker/insulation mat	49
Ergolastec Solid/Floor, Ergolastec Unigrip/Unimat	50 - 51



Entrance flooring

Jet Print Vision, Jet Print Plus	54 - 55
Coral® Click, Coral® Brush	56 - 57
River	58
Sepio Loop, Royal	59 - 60
Coral® Interior	61




Aluminium mats

Diplomat	64
Econo Heavy MIX	65



Artificial grass, hybrid grass

Artificial grass	68 - 69
Hybrid grass, accessoires	70
Sport grass, SkiGrass	71





LEITNER
ropeways



21



Honeycomb rubber mats

Outdoor

Many customer discussions, the content of which was always the same questions and answers, have prompted us to compile an overview of the most important rubber mat basics for your information and easier decision-making.

General

Rubber (also: caoutchouc) is a natural product. It is „milked“ out of rubber trees and caught in containers. In its original state, rubber is colorless and viscous. Only by adding ingredients it gets its consistency, color and desired properties.

Natural rubber mats are manufactured using two different processes:

New:

The rubber is vulcanized. Vulcanization is a chemical-technical process in which rubber is made resistant to atmospheric and chemical influences as well as mechanical stress under the influence of time, temperature and pressure. Substances are added which shape its later properties, such as low flammability (untreated rubber burns) or cut resistance. Thus, the whole mat forms a unit and receives its incomparable stability and longevity.

Recycling:

Old rubber products (tires, old mats, etc.) are shredded. The resulting granules are bound again by PU elastomers. As a result, the mat is softer than mats made from new material, but the granules are not permanently bonded and the mat breaks up over time. Especially when laying on gratings, this quickly leads to problems, also the often observed staining in the snow has its reason here.

IMPORTANT: Since 2002, products certified to at least class Cf1-s1 fire protection have had to be used in all entrances and exits to mountain railway stations.*

*also escape routes in the outdoor area, which are connected to the station



Take care of our environment!

Be aware that rubber mats made from recycled materials will **degrade over time due to wear and tear, and fines can end up in snow and groundwater.**

Mats made from new rubber are more durable and do not have **to be replaced every year - conclusion: Less waste, lower costs!**

Honeycomb mats

for railways and Co.



Plon 2

recycled rubber honeycomb mat



Accessoires




saw blades



connectors



insert brushes



- high durability
- suitable for high frequencies
- slip resistance
- withstands low temperatures
- low icing
- dimensionally stable $\pm 2,5\%$

Technical Data*

Material	40% recycled rubber 60% new rubber
Height	21,5 mm
Weight	11,3 kg/m ²
Fire resistance class	-
Dimensions	100 x 150 cm
Colour	black
Free from PVC	✓



Delivery	Mat*	Cut*
	100 x 150 cm	Size freely selectable
Art. Nr.	50 1332-1/50 1432-0	50 1332-1-Z/50 1332-0-Z
PLON 2 closed	✓	⊕
PLON 2 open	✓	⊕

- ✓ Delivery within 24-48 hours (large quantities on request)
- ⊕ Delivery within 10-15 business days (large quantities on request)

*all dimensions are approximate dimensions

- high durability
- suitable for high frequencies
- slip resistance
- withstands low temperatures
- low icing
- soft and light - ideal for stairs
- long lasting



Accessoires



saw blades

Lech

rubber honeycomb mat made from new rubber



Technical Data*

Material	100% new rubber
Height	19 mm
Weight	11,3 kg/m ²
Fire resistance class	-
Dimensions	100 x 150 cm
Colour	black
Free from PVC	✓

Delivery	Mat*	Cut*
		100 x 150 cm
Art. Nr.	50 10-150	10-150-Z
LECH	✓	⊕

✓ Delivery within 24-48 hours (large quantities on request)
 ⊕ Delivery within 10-15 business days (large quantities on request)

*all dimensions are approximate dimensions

Lech CUT FR - on request


cut-resistant rubber honeycomb mat made of new rubber - flame retardant



Accessoires



saw blades



- cut-resistant on gratings
- high durability
- suitable for high frequencies
- slip resistance
- withstands low temperatures
- low icing

Technical Data *

Material	100% new rubber
Height	19 mm
Weight	11,3 kg/m ²
Fire resistance class	Cfl-s1
Dimensions	100 x 150 cm
Colour	black
Free from PVC	✓



Delivery	Mat*
	100 x 150 cm
Art. Nr.	10-206 LECH-CUT
LECH CUT FR	A
A on request	

*all dimensions are approximate dimensions

- cut-resistant on gratings
- long downtimes
- high durability
- suitable for the highest frequencies
- slip resistance
- withstands low temperatures


also available with a closed back



Accessoires



saw blades



insert brushes



connectors

Pitz CUT FR - on request (classic shape)

cut-resistant rubber honeycomb mat made of new rubber - flame retardant



© Doppelmayr



Technical Data*

Material	100% new rubber
Height	23 mm
Weight	15 kg/m ²
Fire resistance class	Cfl-s1
Dimensions	100 x 150 cm
Colour	black
Free from PVC	✓

Delivery	Mat*	Cut*
		100 x 150 cm
Art. Nr.	50 2506-0-CFL	50 2506-0-Z-CFL
PITZ CUT (open or closed)	A	A
A	on request	

*all dimensions are approximate dimensions



Pitz CUT Premium FR


cut-resistant rubber honeycomb mat made of new rubber - flame retardant



© Doppelmayr

Technical Data*

Material	100% new rubber
Height	23 mm
Weight	15 kg/m ²
Fire resistance class	Cfl-s1
Dimensions	100 x 150 cm
Colour	black
Free from PVC	✓



Accessoires



saw blades



connectors premium



insert brushes

- cut-resistant on gratings
- longest standing times
- highest durability
- suitable for the highest frequencies
- improved slip resistance
- withstands the lowest temperatures
- low icing
- permanent ribs

also available with closed back and in special colors (min. 150 pieces)

can be combined with Sportec® mountain references available on request



Delivery	Mat*	Cut*
		100 x 150 cm
Art. Nr.	50 2516-0-CFL	50 2516-0-Z-CFL
PITZ CUT Premium FR (open or closed)	✓	⊕

- ✓ Delivery within 24-48 hours (large quantities on request)
- ⊕ Delivery within 10-15 business days (large quantities on request)

*all dimensions are approximate dimensions

- longest standing times
- highest durability
- suitable for the highest frequencies
- improved slip resistance
- withstands the lowest temperatures
- low icing
- permanent ribs

also available with a closed back



Accessoires



saw blades



insert brushes



connectors for premium

Pitz Premium

rubber honeycomb mat made from new rubber



© Doppelmayr



Technical Data*

Material	100% new rubber
Height	23 mm
Weight	15 kg/m ²
Fire resistance class	-
Dimensions	100 x 150 cm
Colour	black
Free from PVC	✓

Delivery	Mat*	Cut*
		100 x 150 cm
Art. Nr.	50 1416-0	50 1416-0-Z
PITZ CUT Premium (open)	✓	⊕

✓ Delivery within 24-48 hours (large quantities on request)

⊕ Delivery within 10-15 business days (large quantities on request)

*all dimensions are approximate dimensions

Delivery table & accessoires

cut-resistant rubber honeycomb mat made of new rubber - flame retardant

	Product		Height	Dimensions Width x Length	
Mat	LECH		19 mm open	100 x 150 cm	✓
	LECH CUT FR	Cfi-s1	19 mm open	100 x 150 cm	A
	PLON 2		21,5 mm open	100 x 150 cm	✓
	PLON 2		21,5 mm closed	100 x 150 cm	✓
	PIIZ Cut Premium		23 mm open	100 x 150 cm	✓
	PIIZ CUT FR	Cfi-s1	23 mm open	100 x 150 cm	A
	PIIZ CUT FR	Cfi-s1	23 mm closed	100 x 150 cm	A
	PIIZ CUT Premium FR	Cfi-s1	23 mm open	100 x 150 cm	✓
	PIIZ CUT Premium FR	Cfi-s1	23 mm closed	100 x 150 cm	✓
Cut	LECH		19 mm open	freely selectable	⊕
	PLON 2		21,5 mm open	freely selectable	⊕
	PLON 2		21,5 closed	freely selectable	⊕
	PIIZ CUT Premium		23 mm open	freely selectable	⊕
	PIIZ CUT FR	Cfi-s1	23 mm open	freely selectable	A
	PIIZ CUT FR	Cfi-s1	23 mm closed	freely selectable	A
	PIIZ CUT Premium FR	Cfi-s1	23 mm open	freely selectable	⊕
	PIIZ CUT Premium FR	Cfi-s1	23 mm closed	freely selectable	⊕
✓ Delivery within 24-48 hours (large quantities on request) ⊕ Delivery within 10-15 business days (large quantities on request) A on request					

Attention! Terms of delivery from the Innsbruck warehouse


Accessoires



saw blades




connectors
premium



edge profile




GLP marker color



insert brushes
(Ø ca. 22 mm)




connectors



mounting
frame

*all dimensions are approximate dimensions

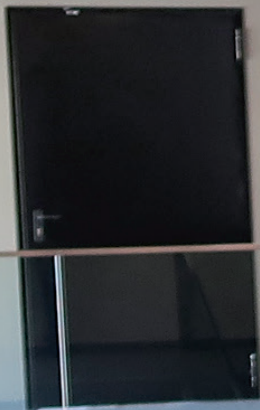




Kraiburg Sportec sport flooring



SPORTEC® mountain



SOLUTION FOR SKI RESORTS, SKI LIFTS AND SKI RENTAL SHOPS

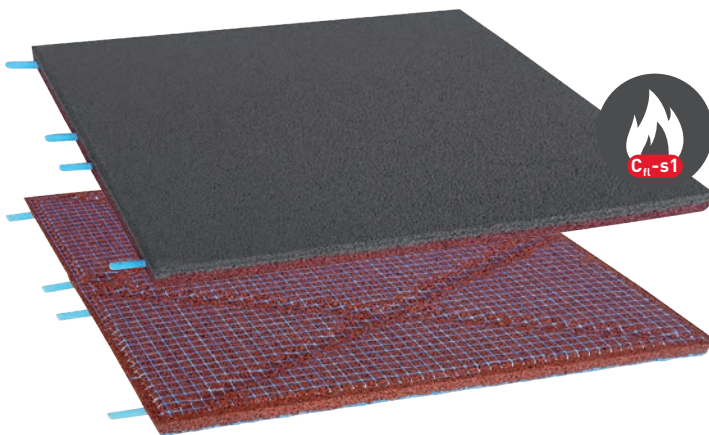

top covering



grid

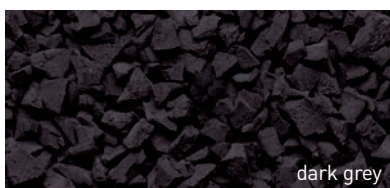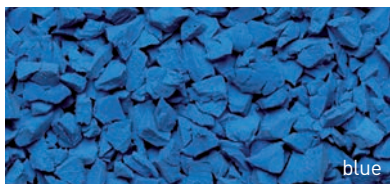

» MORE FROM YOUR FLOOR



Material

Tire recycling granules bonded with polyurethane elastomer and reinforced with a mesh fabric, surface made of EPDM granules bonded with polyurethane elastomer.

Colour

standard colours
(special colours on request)

Length / Width / Height

500 x 500 (± 0,8%) x
30 mm (± 2 mm)

Temperature range

-30°C to 80°C

Installation

on metal grid

NEW as a supplement:
transition plates for honeycomb mats available










can be cut with a saw blade



SPORTEC® neon

SOLUTION FOR FITNESS AREAS, SALES ROOMS, TRADE FAIRS AND ICE RINKS



Applications



»MORE FROM YOUR FLOOR




Material	Fine tire recycling rubber granules (black) and EPDM colored granules bound with polyurethane elastomer,
Lane width	1.500 mm (± 1,5%)
Height	color 0: 4, 6, 8 mm (± 0,3 mm)
Roll length	length m (± 1,5%)/thickness mm: 30/4, 20/6, 15/8



SPORTEC® style

THE IDEAL SOLUTION FOR FREE WEIGHT AREAS

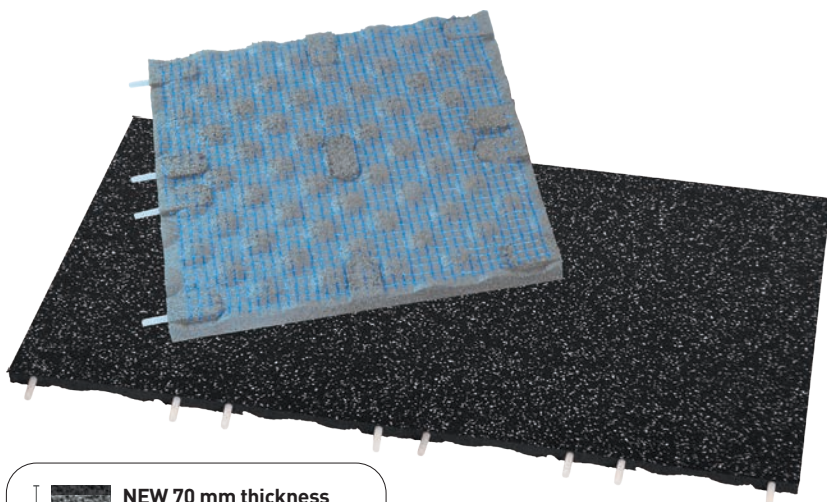

Applications




»MORE FROM YOUR FLOOR




Optionally with embossed design surface (H stone look)

(only for 500 x 500 x 30 mm)



NEW 70 mm thickness
for outstanding sound
and vibration isolation



Material

tire recycling granulate bonded with polyurethane elastomer, various surfaces

Colours

SPORTEC® color 15 / purcolor / UNI versa (only 30 mm)

Height

30, 70 mm (± 2 mm)

Dimensions

30 mm: 500 x 500 / 1.000 x 500 mm / 1.000 x 1.000 mm (± 0,8 mm)
70 mm: 500 x 500 mm (± 0,8 mm)

SPORTEC® UNI versa
(for outdoor areas)

SPORTEC® purcolor


SPORTEC® color 15
(also color 0)




can be cut with a saw blade



SPORTEC® style edge- & corner ramps
 PERFECT ACCESSORIES FOR MORE SAFETY

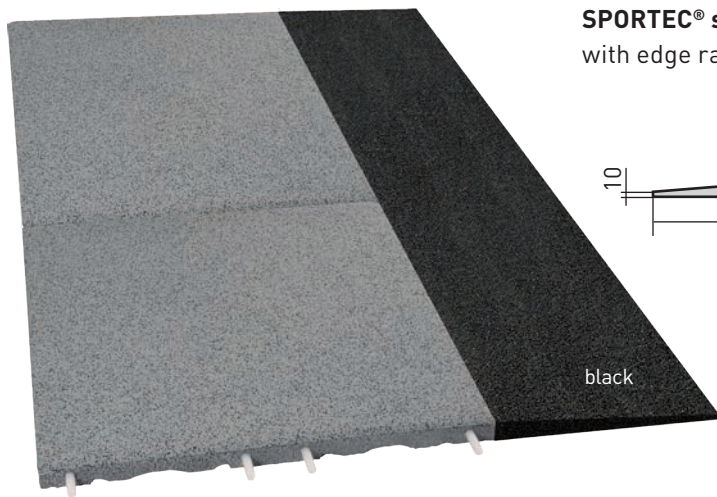

SPORTEC® style
with edge ramp



black



NEW
also available with fire
resistance class Cfl-s1



SPORTEC® style
with corner ramp

red

Applications



»MORE FROM YOUR FLOOR

- ideal beveled border for SPORTEC® style surfaces to avoid stumbling blocks at the edges
- metal edging (L-profile) required
- glued to the substrate and the joints of the panels for a secure hold




Material	recycled rubber granules
Height	edge ramp: 30/10, 70/20 mm corner ramp: 30/10, 70/20 mm tolerances: ± 2 mm
Dimensions	1.000 x 250 mm tolerances: ± 0,8 %



SPORTEC® color

ROBUST, EASY-CARE ALL-ROUNDER

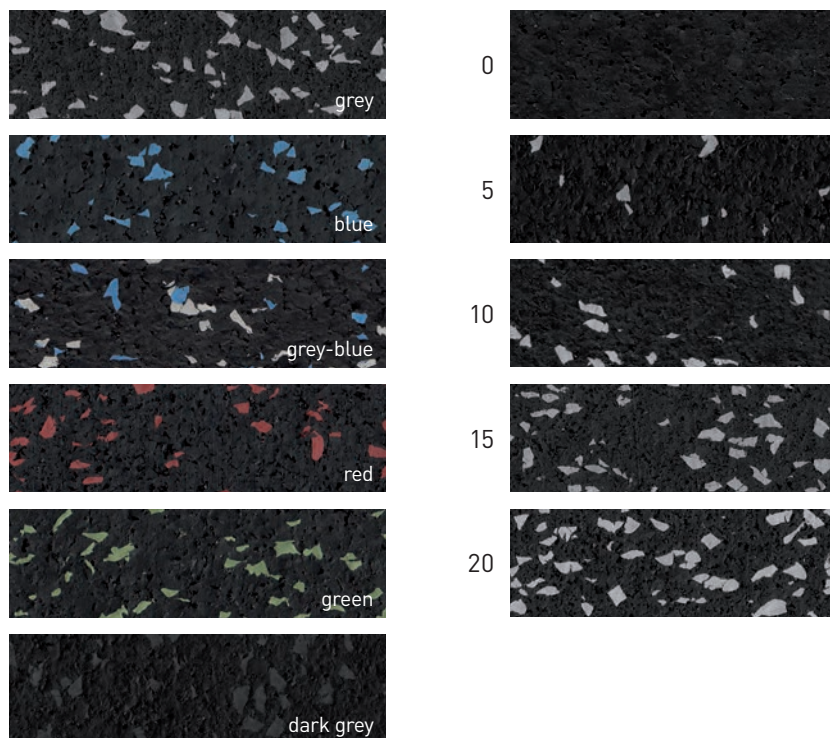

Applications



»MORE FROM YOUR FLOOR



Material fine tire recycling rubber granules (black) and EPDM colored granules proportions of 0, 5, 10, 15 or 20%, bonded with polyurethane elastomeric

Lane width 1.500 mm (± 1,5%)





Height
color 0: 4, 6, 8, 10 mm* (± 0,3 mm)
color 5, 10, 20: 6 mm* (± 0,3 mm)
color 15: 4, 6, 8, 10 mm (± 0,3 mm)
 [*other heights on request]

Roll length length m (± 1,5%)/height mm: 30/4, 20/6, 15/8, 12/10



SPORTEC® purcolor

UPPER RUBBER WITH INCREASED COLOR PROPORTION

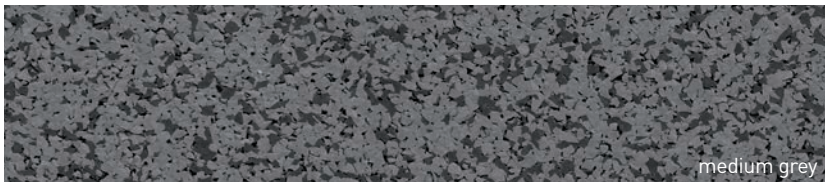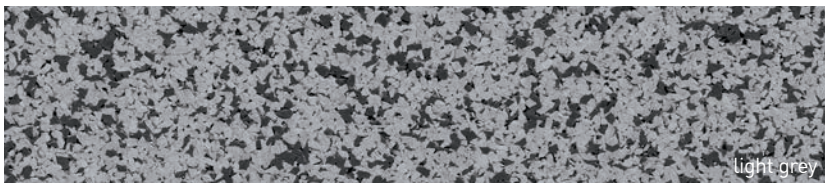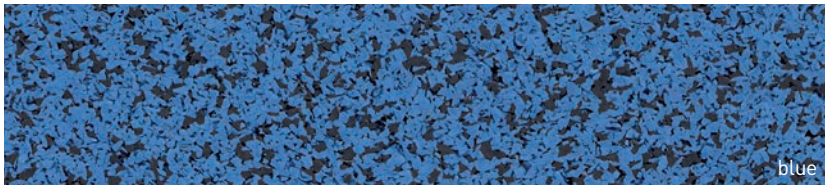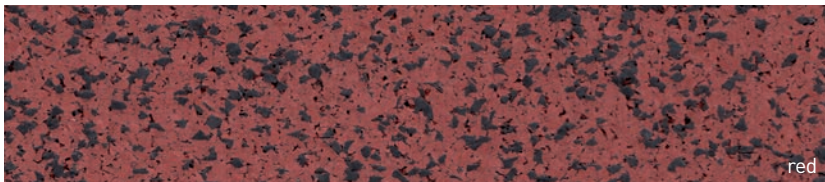

Applications



»MORE FROM YOUR FLOOR



Material 100% EPDM granules bonded with polyurethane elastomer

Lane width 1.250 mm (± 1,5%)



Height 4, 6, 8 mm (± 0,3 mm)
(other heights on request)

Roll length length m (± 1,5%)/thickness mm:
30/4, 20/6, 15/8



SPORTEC® variant

ATTRACTIVE COLOR MIXES OR INDIVIDUALLY ACCORDING TO YOUR REQUIREMENTS

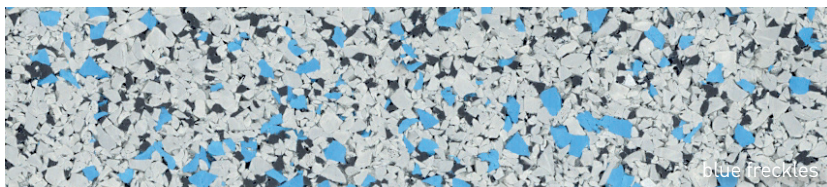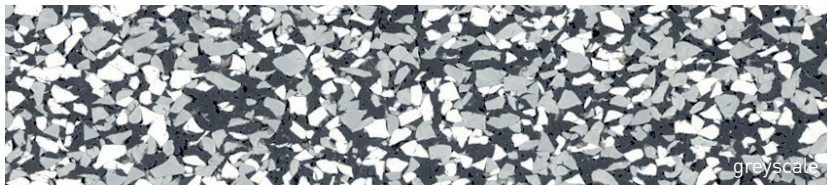

standard designs

Applications



» MORE FROM YOUR FLOOR



Material	coloured EPDM rubber granules bonded with polyurethane elastomer
Lane width	1.250 mm (± 1,5%)
Height	4 or 6 mm (± 0,3 mm) (other heights on request)
Roll length	length m (± 1,5%)/thickness mm: 30/4, 20/6







SPORTEC® Color Mixer

Create your desired color combination yourself!
(Minimum order quantity: 1 cylinder - area depends on material height)



SPORTEC® UNI classic

IDEAL FLOORING FOR INDOOR SPORTS FACILITIES

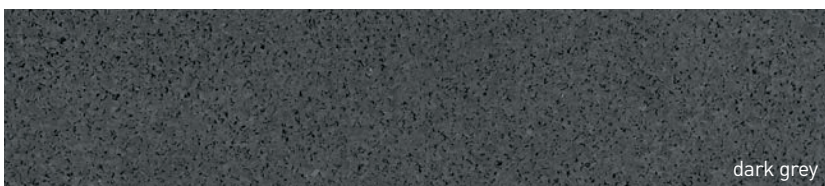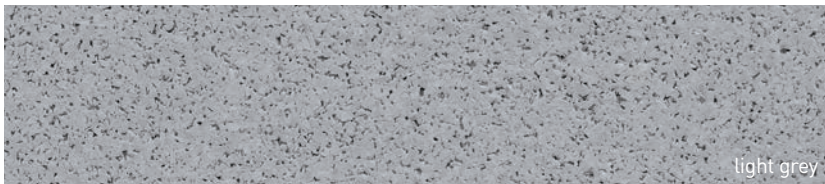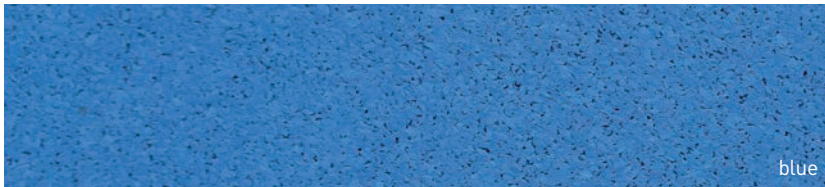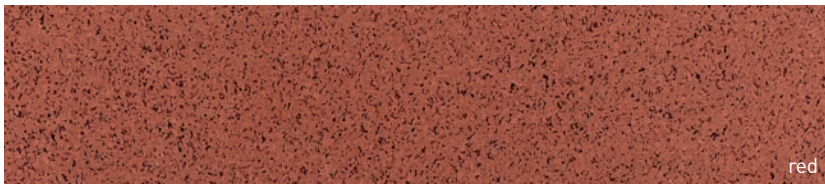

Applications



»MORE FROM YOUR FLOOR



Material fine colored EPDM granules bonded with polyurethane elastomer

Lane width 1.250 mm (± 1,5%)

Height 4 mm (± 0,3 mm)
(other heights on request)





Roll length length (± 1,5%): 15 m





SPORTEC® UNI versa

IDEAL FLOORING FOR INDOOR AND OUTDOOR SPORTS FACILITIES

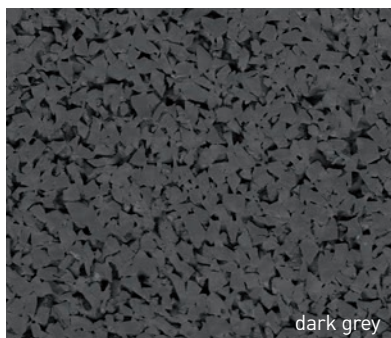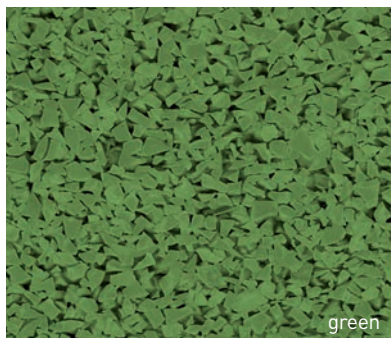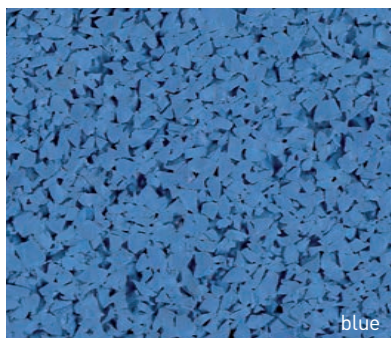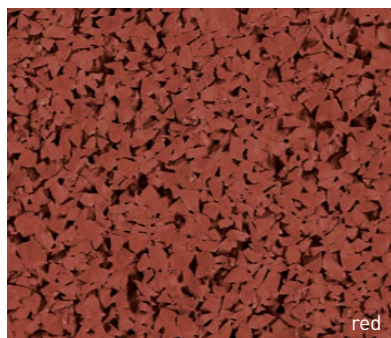

Applications



»MORE FROM YOUR FLOOR



Material	coarse coloured EPDM granules bonded with polyurethane elastomer
Lane width	1.250 mm (± 1,5%)
Height	4 mm (± 0,3 mm) (other heights on request)
Roll length	30 m (± 1,5%)






* SPORTEC® UNI versa light grey only indoor



SPORTEC® UNI versa sandwich

PROTECTION AGAINST INJURIES AND JOINT DAMAGE INDOORS AND OUTDOORS

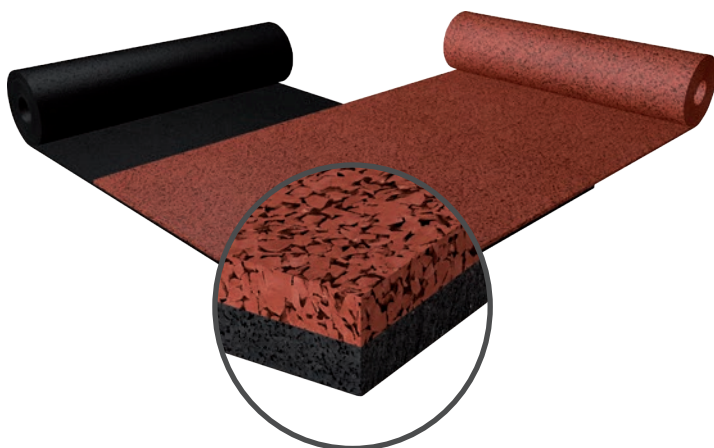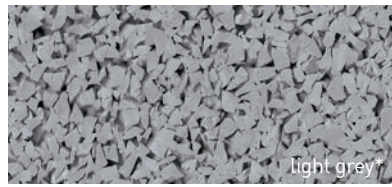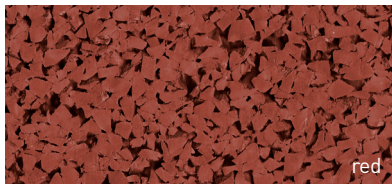

Applications



»MORE FROM YOUR FLOOR



Material

Surface: coarse coloured EPDM granules bonded with polyurethane elastomer

Elastic layer: fine tire
Recycled rubber granulate bonded with polyurethane elastomer

Lane width

Surface: 1.250 mm (± 1,5%)
Elastic layer: 1.500 mm (± 1,5%)

Height

Surface: 4 mm (± 0,3 mm)
Elastic layer: 4 mm (± 0,3 mm)
(other heights on request)

Roll length

Surface: 30 m (± 1,5%)
Elastic layer: standard length
(weitere Längen auf Anfrage)

* SPORTEC® UNI versa sandwich light grey only indoor







Euroflex Fall protection, playground

With EUROFLEX® Soft Grip, a stable, close-meshed grid is pressed into our tried-and-tested impact protection slab made of recycled rubber granulate, which has a rough surface. The product is used wherever extreme slip resistance is required, for example in harbour facilities, on boats, on walkways in hospitals and old people's homes or even on footbridges.

Colours

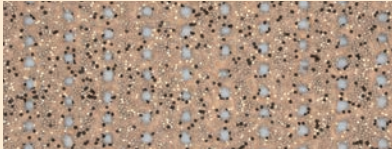

beige

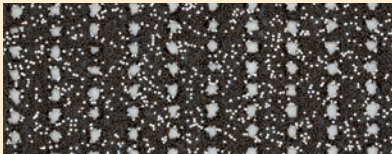

brown

Soft Grip

non-slip surface, 100% recyclable

EUROFLEX®



Technical Data*

Construction substructure	rubber - recycling granulate
Construction top layer	PES/Glass yarn fabric on both sides with special PVC paste
Construction surface	sprinkled with PVC granules
Binder	MDI PU
Surface	open-pored smooth
Substructure	semicircular nub profile
Length x Width	1000 x 1000 mm
Height	30 mm
Weight	25 kg/slab
Fire resistance class	Bfl-s2
Slip resistance	R12
incl. 8 pcs. plastic connectors/m	


*all dimensions are approximate dimensions

Soft Touch

Fallschutzplatte mit Rutschhemmung




With EUROFLEX® Soft Touch, a stable, close-meshed grid is pressed into our tried-and-tested impact protection slab made of recycled rubber granulate, which has a smooth, soft surface. Typical areas of use are highly stressed, abrasion-sensitive areas on playgrounds, such as slide runs, swings or roundabouts. The board is also ideal for outdoor fitness, calisthenics or parkour.




Technical Data*

Construction substructure	rubber - recycling granulate
Construction top layer	PA flocked fabric
Binder	MDI PU
Soft system sub-lane	plastic
Surface	open-pored smooth
Substructure	semicircular nub profile
Fire resistance class	Cfl-s2
Slip resistance	R11
Dimensions	see table below
incl. 8 pcs. plastic connectors/m	

Colours

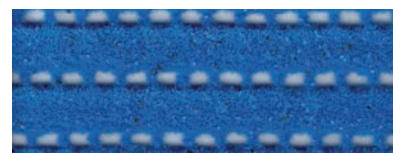

blue

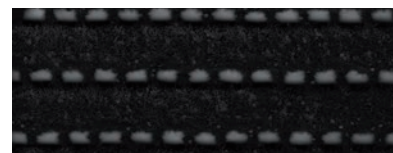

black

Dimensions [mm]*	Weight [kg/pcs.]*	Max. fall height [m]*
500 x 500 x 30	5,7	1,00
500 x 500 x 40	6,9	1,20
500 x 500 x 50	8,2	1,50
500 x 500 x 55	8,6	1,60
500 x 500 x 70	10,7	2,00
500 x 500 x 80	12,6	2,30

Soft system:

Dimensions [mm]*	Weight [kg/pcs.]*	Max. fall height [m]*
Soft system 90** 500 x 500 x 70 + Sub-Lane (LxWxH) 30.000 x 1.000 x 20	10,7	2,80
Soft system 100** 500 x 500 x 80 + Sub-Lane (LxBxH) 30.000 x 1.000 x 20	12,6	3,00

**Soft system: slab combined with sub-lane

*all dimensions are approximate dimensions

The shock-absorbing properties of the EUROFLEX® fall protection slabs represent the optimal combination of safety and suitability for everyday use. Regardless of the weather and temperature, they allow untroubled playing fun - day after day. EUROFLEX® fall protection slabs are TÜV-tested according to DIN EN 1177:2018.

Edge and edge corner profiles ensure a smooth, barrier-free transition and reduce the risk of tripping. This also makes it possible to drive up with wheelchairs and prams.


Colours standard (500 x 500 mm)




Letters, numbers, motives (500 x 500 mm)



Extensions



protect slab (for slide skirts & swings)



edge and corner ramps

*all dimensions are approximate dimensions

Fall protection

fall protection slab with shock absorbing properties

EUROFLEX®



Technical Data*

Construction	rubber - recycling granulate bonded with colored MDI polyurethane
Surface	open-pored smooth
Substructure	semicircular nub profile
Fire resistance class	Efl
Impact sound insulation	45 dB at 50 mm
Cold rupture strength	24h/-40°C, no breakage, self-check
Cold resistance	5h/-30°C, no breakage, self-check
incl. 8 pcs. plastic connectors/m	

Max. fall height [m]*	Height [mm]*	Dimensions [mm]*	Weight approx. [kg/pcs.]*
1,00	30	500 x 500	5,3
1,00	30	500 x 250	2,7
1,20	40	500 x 500	6,7
1,20	40	500 x 250	3,3
1,20	40	1.000 x 500	13,3
1,50	50	500 x 500	7,8
1,50	50	500 x 250	3,9
1,50	50	1.000 x 500	15,5
1,60	55	500 x 500	8,1
1,70	60	500 x 500	9,1
2,10	70	500 x 500	10,3
2,10	70	500 x 250	5,2
2,40	80	500 x 500	11,8
2,40	80	500 x 250	5,9
2,60	80	Soft system**	9,3
3,00	90	Soft system**	10,5

**Soft system: slab combined with sub-lane

Fall protection EPDM, multicolor, mulch

fall protection slab with shock absorbing properties




EPDM fall protection slabs not only meet the highest safety requirements according to DIN EN 1177:2018, but also allow a variety of color designs. They also support the creativity of our children.


The EPDM fall protection plates are available in all EPDM colors, the mulch plate only in the two color variants shown.

Technical Data*


Construction surface	rubber - recycling granulate
Construction substructure	EPDM rubber granules
	two or three colors
	bonded with MDI polyurethane
Surface	open-pored smooth
Substructure	semicircular nub profile
Fire resistance class	Bfl-s1 (Cfl-s1 mulch)
Slip resistance	class C DIN 51097
Abrasion test	BS EN 7188-4
	incl. 8 pcs. plastic connectors/m



fall protection EPDM



fall protection EPDM mulch - with mulch fiber structure



fall protection EPDM multicolor - up to three individual colours

Max. fall height [m]*	Height [mm]*	Dimensions [mm]*
1,00	30	500 x 500
1,20	40	500 x 500
1,40	50	500 x 500
1,60	55	500 x 500
2,10	70	500 x 500
2,40	80	500 x 500
3,00	90	Softsystem**

**Softsystem: Platte kombiniert mit Unterbaubahn

*all dimensions are approximate dimensions

Aqua fall protection slabs are suitable as a shock-absorbing floor covering for play areas, especially in leisure pools that are equipped with a wide variety of water fountains. The slab generation combines the usual safety aspect with an attractive EPDM surface in 20 different uni colors or in two or three EPDM mixed colors. Due to the more compact compression, greater abrasion resistance is achieved. The anti-slip properties were tested according to DIN 51097:1992-11, evaluation group C.

Aqua fall protection

fall protection slab for play areas in water and spray parks



Technical Data*

Construction surface	rubber - recycling granulate
Construction substructure	EPDM rubber granules two or three colors bonded with MDI polyurethane
Surface	open-pored smooth
Substructure	semicircular nub profile
Fire resistance class	Cfl-s1

Anti-slip properties for wet barefoot areas DIN 51097:1992-11

Rating group	C nach DIN 51097
Abrasion resistance	rV 5,9 DIN 18035
Resistance	conditionally resistant to acids and alkalis, self-test
Salt water resistance	tested according to DIN EN ISO 175, DIN EN ISO 3386-2
Chlorine resistance	tested according to DIN EN ISO 175, DIN EN ISO 3386-2
UV resistance	tested according to EN ISO 1297, DIN EN ISO 3386-2
Abrasion resistance	BS EN 7188-4
incl. 8 pcs. plastic connectors/m	

Max. fall height [m]*	Height [mm]*	Dimensions [mm]*
0,90	30	500 x 500

*all dimensions are approximate dimensions

Visual System indoor and outdoor

fall protection plate with printed surface covering for indoor and outdoor use



With the new Visual System, you can now print custom designs down to the pixel - in virtually any shape or size! From designs such as stones, lawn, wooden floors, sea, jungle to your own logo, corporate design colors or lines, everything is possible!



Visual System




Visual System comfort

Technical Data*

Construction	rubber - recycling granulate
Surface	offenporig glatt
Substructure	half-round nub profile or insulating underlay (comfort)
Total weight	depending on dimensions 5.2 kg to 12 kg
Fire resistance class	Bfl-s1
Slip resistance	R10
Force reduction indoor	DIN EN 14808 (self-test)
	33 mm 57,7%
	73 mm EF 70,3%
	Soft system 93 mm 74,4%

incl. 8 pcs. plastic connectors/m

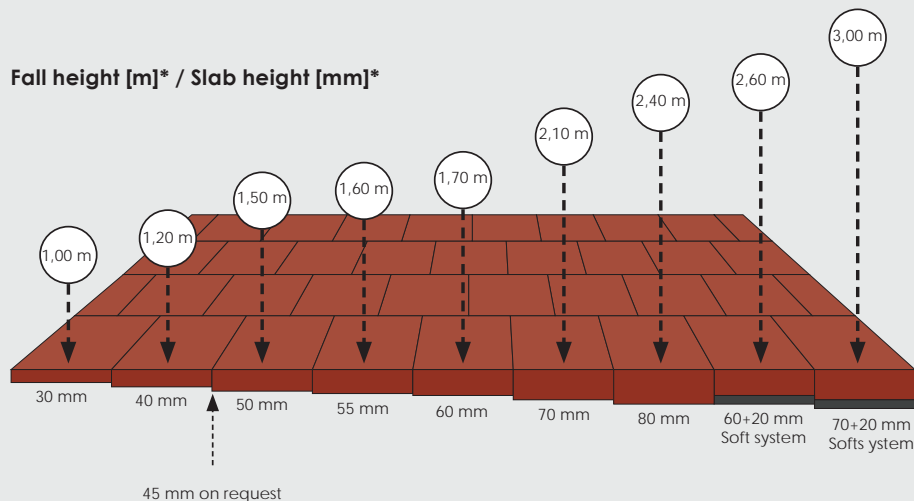

*all dimensions are approximate dimensions

The high degree of compaction of the ball game surface is reflected in high abrasion resistance and tested ball bounce properties (according to DIN 18032 Part 2). The high elasticity of the ball game panels ensures play that is easy on the ligaments and joints.


Colours



Sports pavement slabs

floor system with tested ball bounce properties

EUROFLEX®



Technical Data*

Construction	rubber - recycling granulate
Binder	coloured MDI polyurethane
Surface	open-pored smooth
Substructure	semicircular nub profile
Fire resistance class	Efl
Noise reduction	23 dba
Residual impression	0,41 mm
Height/Fall height/Weight	30 mm/0,90 m/26,4 kg/m ² 40 mm/1,10 m/34,2 kg/m ²
Length x Width x Height	500 x 500 x 30 mm 500 x 500 x 40 mm 1000 x 500 x 40 mm
Ball bounce properties	99% at 30 mm 101% at 40 mm
incl. 8 pcs. plastic connectors/m	

*all dimensions are approximate dimensions

Elastic pavement blocks, paving block tile

flooring for football pitches, street ball areas, etc.



Elastic pavers and H-stone slabs offer the familiar look of paving stones, but are elastic and non-slip in contrast to concrete. They also dry faster after rain. They are the ideal flooring for sidewalks in rehabilitation centers, day-care centers, retirement homes, hospitals, outdoor fitness parks and golf courses.

Technical Data Elastic pavement blocks*


Construction	rubber - recycling granulate
Binder	MDI polyurethane
Surface	closed open-pore smooth, edges bevelled
Substructure	smooth, edges not bevelled
Length x Width x Height	Total: 200 x 165 x 43 mm Half: 100 x 165 x 43 mm Edge piece: 200 x 140 x 43 mm
Weight	Total: 1,00 kg/Stk. Half: 0,5 kg/Stk. Edge piece: 0,9 kg/Stk.
Fire resistance class	Efl
Sound improvement	26 dB
Temperature resistance	-40°C to +80°C
Fall height	up to 1,0 m

Technical Data Paving block tile*


Construction	rubber - recycling granulate
Binder	MDI polyurethane
Surface	open-pored H stone look
Substructure	semicircular nub profile
Length x Width x Height	500 x 500 x 40 mm
Basis weight	36,0 kg/m ²
Fire resistance class	Efl
Fall height	up to 1,1 m
	incl. 8 pcs. plastic connectors/m



Elastic pavement block



Paving block tile

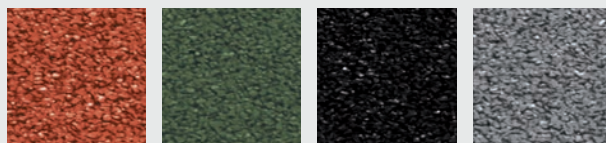

*all dimensions are approximate dimensions

Playground accessoires

turns every playground into an experience

EUROFLEX®



Playground accessoires

turns every playground into an experience



Caterpillar head

Technical Data*


Material	rubber - recycling granulate
Binder	MDI polyurethane
Diameter	695 mm
Weight	84,0 kg
Size	110 x 105 cm



Ball, half ball

Technical data*


Material	rubber - recycling granulate
Binder	MDI polyurethane
Surface	open-pored smooth
Diameter	345 mm, 500 mm, 695 mm
Colour	red, green, black, grey, multicolor

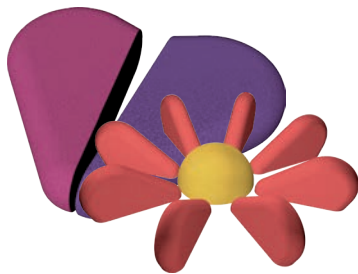

Half heart

Technical Data*

Material	rubber - recycling granulate
Binder	MDI polyurethane
Weight	37 kg
Height	180 mm
Fire resistance class	Cfl-s1
Size	105 x 105 cm

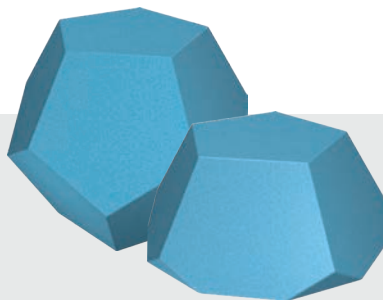


Diamond

Technical Data*

Material	rubber - recycling granulate
Binder	MDI polyurethane
Weight	29,0 kg/58,0 kg
Sizes	500 x 500 x 225 mm/500 x 500 x 450 mm
Colours	EPDM standard colours

half diamond/diamond

Material	rubber - recycling granulate
Binder	MDI polyurethane
Weight	29,0 kg/58,0 kg
Sizes	500 x 500 x 225 mm/500 x 500 x 450 mm
Colours	EPDM standard colours
	also available as a glitter version on request

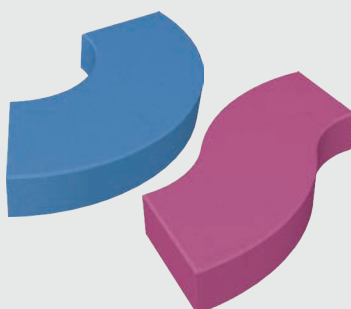

S-Block, C-Block

Technical Data*

Material	rubber - recycling granulate
Binder	MDI polyurethane
Surface	open-pored smooth
Size	105 x 105 cm

*all dimensions are approximate dimensions

Whether in schools and kindergartens, in amusement parks or sports and play facilities: the playground accessories make every playground an experience. It gives children room for creativity and imagination and offers a wide range of play and exercise options.

It not only visually enhances your playground through individual and color design options, but is also perfectly matched to the safety slabs.

Rubber as a material ensures pleasant sitting warmth, dries quickly, is weather-resistant, soft and therefore also safe.

Playground accessoires

turns every playground into an experience



Animals

Technical Data*

Material

Weight

Length x Width x Height

Elephant/Rhino/Dromedary/Pony

EPDM rubber granulate

30,0 kg/30,0 kg/21,0 kg

560 x 190 x 395 mm (Elephant)

700 x 250 x 400 mm (Rhino)

750 x 200 x 510 mm (Dromedary)

580 x 200 x 470 mm (Pony)



Mushrooms

Technical Data*

Material cap

Material stalk

Colour cap

Colour stalk

Diameter cap

Height stalk

EPDM rubber granulate

recycling granulate

red (RAL 3016), green (RAL 6021), yellow (RAL 1002), blue (RAL 5015)

the dot color is variable and colorfully mixed red


15 x 45 cm, weight 13,0 kg

50 x 25,5 cm (incl. ground socket) weight 20 kg

40 x 25,5 cm (incl. ground socket) weight 16 kg

30 x 25,5 cm (incl. ground socket) weight 13 kg

20 x 25,5 cm (incl. ground socket) weight 8 kg

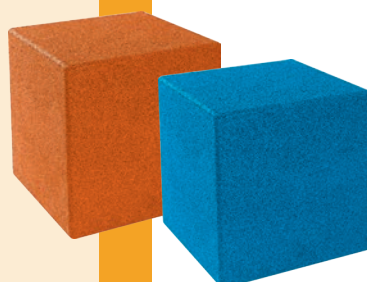

Cube

Technical Data*

Material

Binder

Colour

Length x Width x Height

Weight

Ground anchor

rubber - recycling granulate

MDI polyurethane

red, green, black, grey

400 x 400 x 400 mm

50 kg

Ø 10 mm, length 350 mm (200 mm inside)

*all dimensions are approximate dimensions

Playground accessoires


turns every playground into an experience



Stepper

Technical Data*


Material	rubber - recycling granulate
Binder	MDI polyurethane
Height x Diameter	50 x 25,5 cm (incl. ground socket) weight 20 kg 40 x 25,5 cm (incl. ground socket) weight 16 kg 30 x 25,5 cm (incl. ground socket) weight 13 kg 20 x 25,5 cm (incl. ground socket) weight 8 kg



Rubber palisades

Technical Data*

Material	rubber - recycling granulatet
Binder	MDI Polyurethan
Surface	open-pored smooth integrated steel anchor, slightly slanted to prevent rotation
Length x Diameter	400 x 250 mm 600 x 250 mm 800 x 250 mm

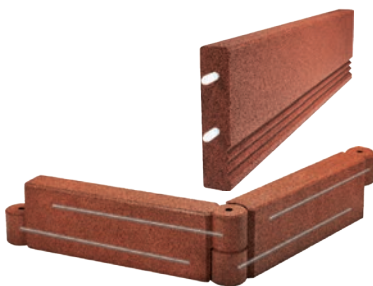


modular sandbox edging, lawn edging

Technical Data*

Material	rubber - recycling granulate
Binder	MDI Polyurethan
Surface	open-pored smooth
Length x Width x Height	1150 x 150 x 300 mm, weight 33,0 kg (modular sandbox edging) 1000 x 250 x 50 mm, weight 11,0 kg (lawn edging)


modular sandbox edging incl. plastic connectors
anchor post (100 cm, 60 cm) separately

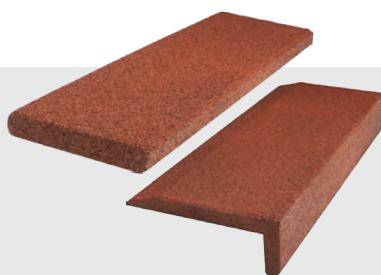

Perimeter panels, edge protectors

Technical Data*

	perimeter panels/edge protectors
Material	rubber - recycling granulate
Binder	MDI polyurethane
Length x Width x Height	1000 x 400 x 45 mm, leg 160 mm (perimeter panels) 1000 x 300 x 50 mm (edge protector)
Weight	19,0 kg (perimeter panels) 12,0 kg (edge protector)

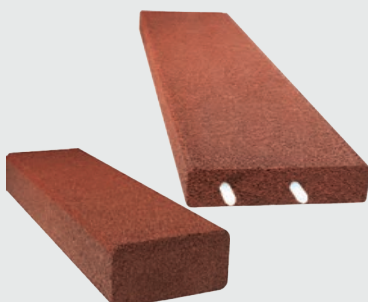

Step block, protective edging

Technical Data*

Material	rubber - recycling granulate
Binder	MDI polyurethane
Surface	open-pored smooth
Size step block	1000 x 300 x 150 mm, 1021/785 x 300 x 150 mm (1/8 circle segment r=1)
Size edging	1000 x 240 x 120 mm 1000 x 250 x 50 mm

*all dimensions are approximate dimensions




Tirolsport

A mat that ensures comfort when training with weights and special equipment. The mats are non-slip, reduce noise and vibration and absorb shock. They are very easy to clean, which is important in places where there are many people train. They ensure good traction of the shoes and are resistant to abrasion and intensive use.



**Colours rubber cover
(colour variations on request)**

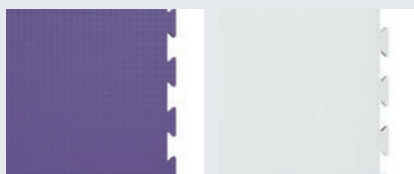

RAL 4005

RAL 9001




RAL 2009

RAL 5015



RAL 3000

RAL 1018

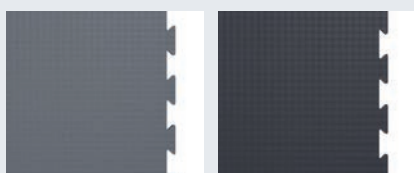



RAL 7024

RAL 9004

*all dimensions are approximate dimensions

Giant Performance

indoor and outdoor mat for gyms

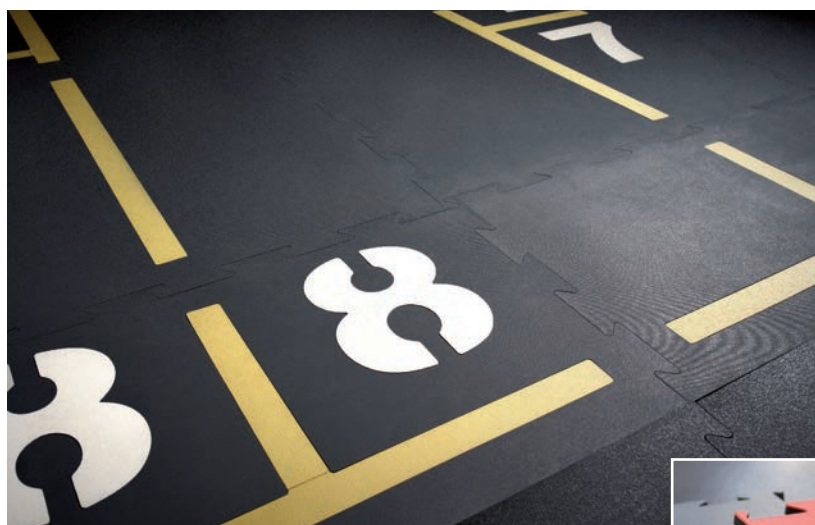

Technical Data*

Material	SBR/EPDM rubber granules, PU, coloured SBR/EPDM rubber cover
Tensile strength	≥ 1,8 MPa Surface ≥ 7 MPa
Hardness	55 ± 3 °ShA
Density	1,05 - 1,15 g/cm ³ Surface 1,25 g/cm ³
Slip resistance	≥ 90 SRT
Abrasion	≤ 270 g
Fire resistance class	Cfl-s1

Dimensions				Unit		Norm
Length*	Width*	Height*	Weight*			
1035 ± 10	1035 ± 10	15 ± 1,5	18	mm	kg	PN-EN ISO 1923
		20 ± 1,5	24			

• mats can also be made in the form of puzzles or cut into various sizes


Giant Fitness/Max

indoor and outdoor mat for sports facilities



Colour rubber top
(colour variations on request)

- ca. RAL 7035
- ca. RAL 3016
- ca. RAL 2011
- ca. RAL 5015
- ca. RAL 6011
- ca. RAL 1012




auch mit 0 %, 5 % oder 15 % Farbanteil

Suitable for indoor and outdoor areas. Such as fitness, sport and home gym. Outdoors suitable as a surface allowing a comfortable workout with the use of weights and special equipment guaranteed. The mats are non-slip, dampen noise and vibration and absorb shock. They are very easy to clean, which is important in places where many people train. They ensure good traction of the shoes, are easy to clean and resistant to abrasion and intensive use. The mats are also skate resistant.

Technical Data*

Material	SBR/EPDM rubber granules, PU
Tensile strength	≥ 1,8 MPa
Hardness	60 ± 5 °ShA
Density	1,05 - 1,15 g/cm ³
Slip resistance	≥ 90 SRT
Abrasion	≤ 250 g
Fire resistance class	Cfl-s1 (standard version Dfl-s1)
Critical fall height	0,3 m (15 mm); 0,8 m (30 mm); 0,9 m (40 mm)




ramps

Product	Dimensions				Unit		Norm
	Length*	Width*	Height*	Weight*			
Giant Fitness	1035 ± 5	1035 ± 5	10 ± 1,5	12	mm	kg	PN-EN ISO 1923
			15 ± 1,5	18			
			20 ± 1,5	24			
			25 ± 1,5	28			
Giant Fitness Max (with wave backing)	1035 ± 5	1035 ± 5	30 ± 1,5	27	mm	kg	PN-EN ISO 1923
			40 ± 1,5	41			
			50 ± 1,5	52			

- coloured version - heavier than standard black, depending on the percentage of EPDM additive
- mats can also be made in the form of puzzles or cut into various sizes



back Giant Fitness

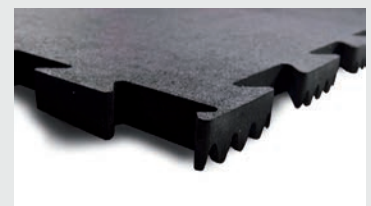

back Giant Fitness Max
(from 30 mm)

*all dimensions are approximate dimensions






Special coverings

Flotex is the ideal solution for areas where durability and hygiene are required and good acoustics are valued. But also where an attractive floor design makes the difference. Flotex textile floors are recommended for offices, shops, schools, leisure and gastronomic facilities as well as for health and elderly care areas.




Flotex Design Colour (90 colours)

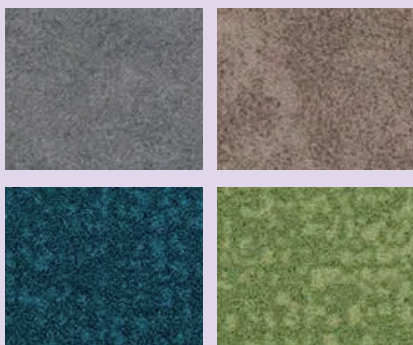

Flotex Design Naturals (wood look)



Flotex Design Vision (6 design categories)

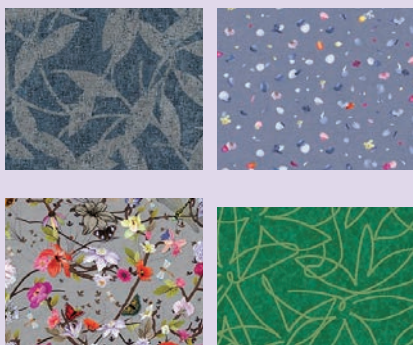

Flotex Design Accent stripes (artline)



*all dimensions are approximate dimensions

Flotex

high-performance textile floor



FLOORING SYSTEMS



Technical Data*

Total height	4,3 mm (tile, plank 5 mm)
Antistatic	<2 kV
Colour fastness	≥6
Wear resistance	class 33
Fire resistance class	Bfl-s1
Sizes	roll, tile (24 cm x 24 cm), plank (100 cm x 25 cm)

12 tiles per box (3 m²), 10 planks per box (2,5 m²)

Delivery	Roll*	Tile*	Plank*
	200 x 3000 cm	205 cm x 27 lfm	105 x 155 cm
all colours and designs	+	+	+


+ Delivery within 2-3 weeks

Safestep R11/R12

for safe steps




FLOORING SYSTEMS

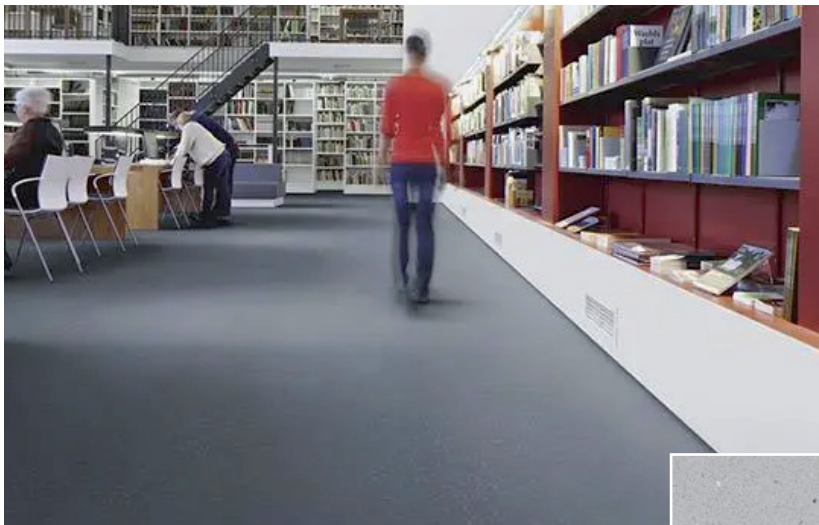

Technical Data*

	R11/R12
Construction	PUR surface with anti-slip particles
Weight	2.750 g/m ²
Total height	2 mm
Wear resistance	class 34
Fire resistance class	Bfl-s1
Antistatic	< 2kV
Slip resistance	R11/R12
Sizes	roll



Safestep safety coverings are available in the anti-slip classes R11 and R12. Floor coverings in this category are intended for use in areas with a high risk of slipping due to permanent soiling of the floor, where slip-promoting substances inevitably get onto the floor due to use.

Delivery	Variable length*	Roll*
	200 cm lane	200 cm x 20-27 lfm
all colours according to colour chart	⊕	⊕
⊕ Delivery within 10-15 business days		



Colours



*all dimensions are approximate dimensions


Colorex Plus is a high performance floor covering system consisting of adhesive free tiles for all applications areas where expensive sub floor preparation or downtime is an issue. Colorex Plus can be installed without disruption of activities and it can be used immediately after installation, even by fork lift trucks.



Everest Montblanc Adula



Quartz Massif Nebo

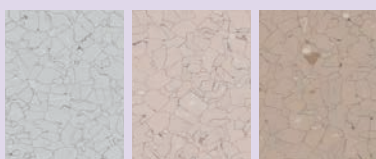


Moonstone Sahara Meru




Assuan Pelion Twilight



Kiwi Pacific Niagara

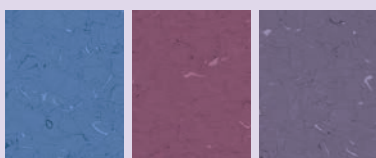

Blue Ridge Fuji Montserrat



Etna


*all dimensions are approximate dimensions

Colorex SD/EC - antistatic

for demanding applications



FLOORING SYSTEMS



Technical Data*



Weight	3.200 g/m ²
Total height	2 mm
Wear resistance	class 34
Fire resistance class	Bfl-s1
Antistatic	< 2kV
Electrical properties -dissipative	$\leq 1 \times 10^9 \Omega$ (only Colorex SD)
Electrical properties -conductive	$\leq 1 \times 10^6 \Omega$ (only Colorex EC)
Slip resistance	R9
Sizes	tile (61,5 cm x 61,5 cm)

Delivery	Tile*
	61,5 x 61,5 cm
all colours according to colour chart	
⬇ Delivery within 10-15 business days	


Fine groove/Checker/Isolation mat

powerful rubber protection mat

Haymon Carpet

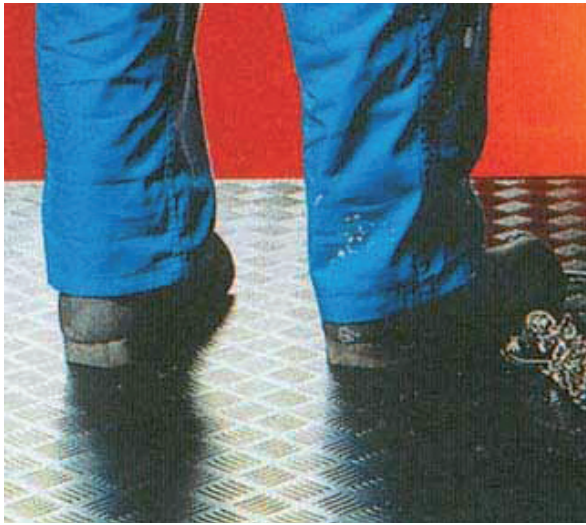

fine groove mat
black



checker mat
black



isolation mat
grey

Technical Data*	Fine groove mat	Checker mat	Isolation mat
Construction	fine groove	hammered design	fine groove
Material	NR-SBR	NR-SBR	NR-SBR
Height	3 mm	3 mm, 5 mm	4,5 mm
Colour	black	black	grey
Dielectric strength	-	-	50 kV
Width	1 m; 1,4 m; 1,25 m	1,4 m; 1,25 m	1,2 m (at 3,5 mm); 1,0 m (at 4 mm)
Roll length	10 m	10 m	10 m

*all dimensions are approximate dimensions


Ergolastec Solid

The robust rubber floor protection mat is the perfect solution against noise in warehouses and for the combination of standing and sitting workplaces. The flat surface structure of the mat enables the problem-free use of swivel chairs and offers extensive floor protection. Combinable with the ergonomic workplace mats from ERGOLASTEC, nothing stands in the way of flexible workplace design.

Ergolastec Floor

A hard-wearing floor protection mat for high mechanical loads in industrial areas. The versatile industrial floor is noise-insulating and, due to the flat surface structure, very easy to drive on and non-slip. Dimensionally stable and flexible - the ERGOLASTEC Floor guarantees many years of use.

Surfaces

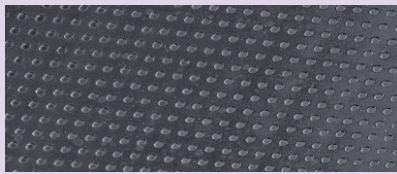

Dry



back Solid




back Floor

Ergolastec Solid/Floor

rubber floor covering



Solid

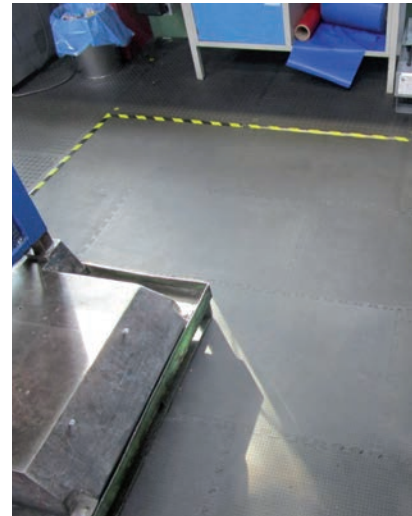

Floor

Technical Data*

Solid/Floor

Material	SBR or NBR rubber/SBR rubber
Back	cylinder nubs/suction cup backing
Total height	16 mm/10 mm
Total weight	25 kg or 30 kg per slab/6,4 kg per slab
Sizes	raw mat with edging (1350 x 1000 mm/1000 x 650 mm) puzzle mat (1350 x 1000 mm/916 x 572 mm)
Shore-Hardness	55-80 Shore A/85 Shore A
Solid also available in oil resistant, fire resistant, ESD and extra hard	

Delivery	Puzzle mat*	
	Solid	Floor
	1350 x 1000 mm	916 x 572 mm
black	+	
+ Delivery within 2-4 weeks		

*all dimensions are approximate dimensions

We reserve the right to a production-related tolerance of +/- 5% for all mats

Ergolastec Unigrip/Unimat

non-slip puzzle mat for heavy loads



Unigrip



Unimat

Ergolastec Unimat/Unigrip is particularly suitable for the running areas in ice rinks, changing rooms, spectator areas and shoe changing zones. Thanks to the cut, spike and non-slip surface of the mat, you are guaranteed to get onto the ice safely.

Ergolastec Unimat/Unigrip also insulates the cold from the floor. Thanks to its puzzle shape, the mat can be laid easily and loosely and scores above all with its good quality firmness. Due to the choice of high-quality materials, Ergolastec Unimat/Unigrip is relatively odorless and can therefore also be used in closed rooms. The mats are hard-wearing and easy to care for.

Also suitable for ice machines.

Technical Data*

Unigrip/Unimat

Material	SBR granules bound
Back	waved
Total height	18 mm/11 mm
Sizes	raw mat without edging (3500 x 1000 mm), puzzle mat (945 x 945 mm)
Shore-Hardness	65 Shore A
Cut	special dimensions according to plan
ice skate resistant, forklift passable, passable with ice machines, cut, spike and slip resistant	

Delivery	Puzzle mat*	
	Unigrip	Unimat
	945 x 945 mm	945 x 945 mm
black	⬇	
⬇ Delivery within 2-4 weeks		

*all dimensions are approximate dimensions


We reserve the right to a production-related tolerance of +/- 5% for all mats





Entrance flooring

The Jet-Print Vision is a luxurious version of the standard Jet-Print, offering the same fine surface texture ideal for bespoke prints such as logos and designs with fine or intricate detail.




standard widths without border: approx. 30 mm smaller
 overlenghts: from 400 cm to max. 700 cm 25% surcharge
 special widths: 25% surcharge
 back: 3mm reinforced rubber backing 15% surcharge

*all dimensions are approximate dimensions

Jet Print Vision

fine dirt and wet coverings for indoor use




Technical Data*

Construction tufted, velour
 Pile material Straight-Set Nylon PA 6.6
 Pile weight without substrate 700 g/m²
 with substrate 800 g/m²
 Pile height 6 mm
 Total height 8 mm
 Back nitrile rubber
 (available with kleeated or smooth backing)
 Total weight 2500 g/m²
 Fire resistance class Cfl-s1
 Width (border all around) 60 cm, 75 cm, 85 cm, 115 cm, 150 cm, 200 cm
 Sizes mat (all lengths up to 700 cm)
 washable up to 60°C
 suitable for tumble drying up to 60°C



Delivery	Variable length* (dimensions incl. edge all around)					
	60 cm lane	75 cm lane	85 cm lane	115 cm lane	150 cm lane	200 cm lane
Art. Nr.	KL 33040	KL 33040	KL 33040	KL 33040	KL 33040	KL 33040
all colours according to colour chart	+					
+ Delivery within 15-20 business days after design approval						

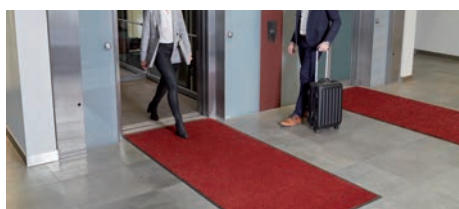


also available as Jet Print Vision Uni!
 (without logo, dimensions like Jet Print Vision)

we reserve the right to a production-related tolerance of +/- 5% for all mats

Jet Print Plus

fine dirt and wet coverings for indoor use



The Jet-Print Plus mat with its fluffy 9 mm pile surface also scores with moisture absorption capacity and hides dirt and dust even more efficiently in the twisted fibers, so that your floors stay cleaner for longer.


The extensive Jet-Print standard color palette is available for creating your individual design on the Jet-Print Plus mat.

Technical Data*

Construction	tufted, velour
Pile material	High-Twist-Nylon PA 6.6
Pile weight	without substrate 950 g/m ² with substrate 1050 g/m ²
Pile height	9 mm
Total height	10 mm
Back	nitrile rubber (available with kleeled or smooth backing)
Total weight	2750 g/m ²
Fire resistance class	Cfl-s1
Width (border all around)	60 cm, 75 cm, 85 cm, 115 cm, 150 cm, 200 cm
Sizes	mat (all lengths up to 700 cm)
washable up to 60°C	
suitable for tumble drying up to 60°C	



Delivery	Variable length* (dimensions incl. edge all around)					
	60 cm lane	75 cm lane	85 cm lane	115 cm lane	150 cm lane	200 cm lane
Art. Nr.	KL 33050	KL 33050	KL 33050	KL 33050	KL 33050	KL 33050
all colours according to colour chart						
Delivery within 15-20 business days after design approval						

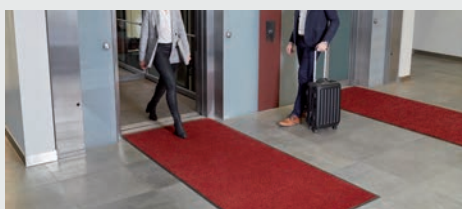


also available as Jet Print Plus Uni!
(without logo, dimensions like Jet Print Plus)

standard widths without border: approx. 30 mm smaller
overlengths: from 400 cm to max. 700 cm 25% surcharge
special widths: 25% surcharge
back: 3mm reinforced rubber backing 15% surcharge



we reserve the right to a production-related tolerance of +/- 5% for all mats

*all dimensions are approximate dimensions



Coral Click is the modular alternative to conventional clean-off systems. The click elements can simply be clicked together and can also be combined with other coral brushes. They allow a wide range of design options in entrance areas, whether inside or outside.




7820/7870/7830/7880
Vulcan Black




7821/7881/7831/7871
Hurricane Grey




7824/7834/7884/7874
Shark Grey



7823/7833/7883
Cardinal Red



7827/7887/7877/7837
Stratos Blue



7828/7888/7878/7838
ohne Textileinsatz

12 mm open/12mm closed/
17 mm open/ 17 mm closed

Coral® Click

modular variant in different versions




FLOORING SYSTEMS



Technical Data*

Variants	open, closed, without textile insert
Pile material	ECONYL® regenerated PA BCF
Total height	14 mm, 19 mm (12 mm, 17 mm without Coral-Brush insert)
Back	UV-resistant vinyl
Fire resistance class	Bfl-s1 (Cfl-s1 without Coral-Brush insert)
Sizes	tile (24 cm x 24 cm) 24 tiles per box (1,38 m²)

Installation options

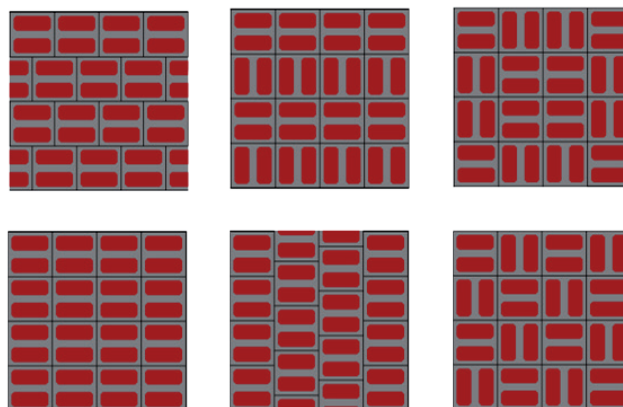

Delivery	Tile*							
	open				closed			
	14 mm	19 mm	12 mm	17 mm	14 mm	19 mm	12 mm	17 mm
Art. Nr.	CO 78-12-24- 24-ME-O	CO 78-17-24- 24-ME-O	CO 78-12-24- 24-OE-O	CO 78-17-24- 24-OE-O	CO 78-12-24- 24-ME-G	CO 78-17-24- 24-ME-G	CO 78-12-24- 24-OE-G	CO 78-17-24- 24-OE-G
with textile insert	⊕	⊕	-	-	⊕	⊕	-	-
without textile insert	-	-	⊕	⊕	-	-	⊕	⊕

⊕ with textile insert approx. 3 weeks
without textile insert approx. 5 weeks


*all dimensions are approximate dimensions

Coral® Brush

fine dirt and wet coverings for indoor use




FLOORING SYSTEMS

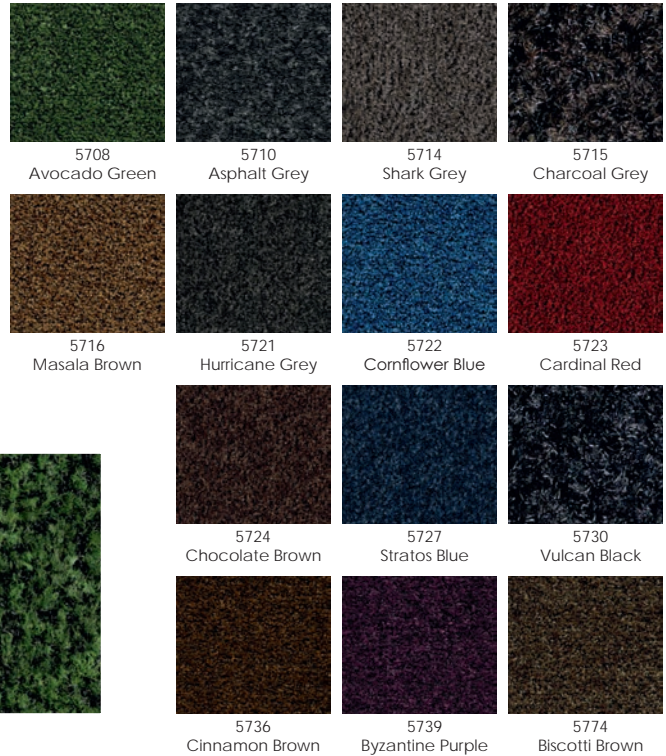

Technical Data*

Construction	tufted, velour
Pile material	ECONYL® regenerated PA BCF
Pile weight	920 g/m ²
Pile height	7 mm
Total height	9 mm
Back	Everfort® vinyl, phthalate free
Total weight	4050 g/m ²
Wear resistance	class 33
Fire resistance class	Bfl-s1
Comfort class	LC3
Sizes	cut, roll, mat (tile, Click System)



Coral Brush with integrated scratch yarn effectively prevents dirt and moisture from getting in. Thanks to its high dirt and moisture absorption, this product ensures a clean appearance over a long term.




Delivery	Variable length* (incl. edge lengthways)			Roll* (incl. edge lengthways)			Mat* (incl. edge all around)			
	105 cm lane	155 cm lane	205 cm lane	105 cm x 27 m	155 cm x 27 m	205 cm x 27 m	55 x 90 cm (PU = 6 Stk.)	90 x 155 cm	135 x 205 cm	205 x 300 cm
Art. Nr.	CO 57-100-Z	CO 47-150-Z	CO 57-200-Z	CO 57-100-R	CO 57-150-R	CO 57-200-R	CO 57-055-90	CO 57-090-155	CO 57-135-205	CO 57-205-300
5708 Avocado Green	⬇	⬇	⬇							
5710 Asphalt Grey	⬇	⬇	✓							
5714 Shark Grey	⬇	✓	✓							
5715 Charcoal Grey	⬇	⬇	⬇							
5716 Masala Brown	⬇	⬇	⬇	⬇ all colours 10-15 business days			⬇ all colours 10-15 business days			
5721 Hurricane Grey	✓	✓	✓							
5722 Cornflower Blue	⬇	⬇	⬇							
5723 Cardinal Red	⬇	⬇	⬇							
all other colours	⬇	⬇	⬇							

- ✓ Delivery within 24-48 hours
- ⬇ Delivery within 10-15 business days


*all dimensions are approx. dimensions
**does not apply to fitted carpets and loose mats

River is a clean-off mat that is optimized for both dirt and moisture absorption. The mat consists of a combination of hard and soft yarns in a loop pile.


The loop pile design effectively hides existing dirt. The strong and resilient pile consists of different yarns.




930 anthracite

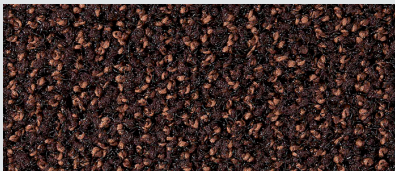


932 brown

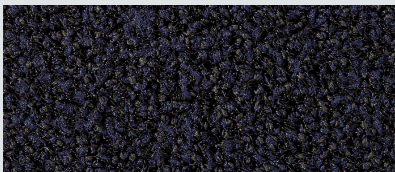

936 blue

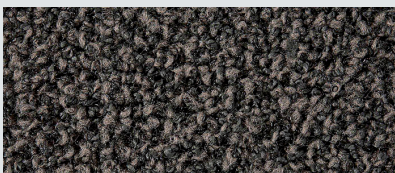

938 grey

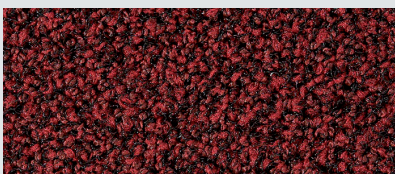

939 red

River

fine dirt and wet coverings for indoor use

Haymon Carpet



Technical Data*

Construction	scraping
Pile material	PA
Pile weight	700 g/m ²
Pile height	5,5 mm
Total height	7,5 mm
Back	PVC (PVC free on request)
Total weight	3600 g/m ²
Wear resistance	class 32
Fire resistance class	Cfl-s1
Comfort class	LC3
Sizes	cut, roll, mat




Liefertabelle	Variable length* (incl. edge lengthways)		Roll* (incl. edge lengthways)		Mat* (incl. edge all around)		
	135 cm lane	200 cm lane	135 cm x 20 m	200 cm x 20 m	60 x 90 cm	90 x 150 cm	135 x 200 cm
Art. Nr.	OS 33-135-Z	OS 33-200-Z	OS 33-135-20	OS 33-200-20	OS 33-60-90	OS 33-90-150	OS 33-135-200
all colours according to colour chart	⬇		⬇		⬇		
⬇ delivery within 10-15 business days							

*all dimensions are approx. dimensions
**does not apply to fitted carpets and loose mats

Sepio tile Loop

fine dirt and wet coverings for indoor use

Milliken™




Milliken Sepio loop clean-off tiles are eye-catchers - and they're laid in no time at all! With its moisture and dirt absorbing fibers, Milliken Sepio keeps every entrance clean!

Technical Data*

Construction	tufted, multilevel loop
Pile material	ECONYL® Nylon 6 and Nylon Monofilament
Pile weight	946 g/m ²
Pile height	6,5 mm
Total height	10 mm
Back	PVC-free WellBAC™ Comfort cushion back
Total weight	3540 g/m ²
Wear resistance	class 33
Fire resistance class	Cfl-s1
Comfort class	LC3
Sizes	tile (50 cm x 50 cm)

12 tiles per box (3 m²)




ø 6,5 mm, ECONYL® Nylon

ø 3,5 mm, WellBAC™ cushion




Liefertabelle	Filese*
	50 x 50 cm
Art. Nr.	MI 51-01-50-50 MI 51-02-50-50
2118 Dark grey/Castle	✓
2019 Dark blue/Zaffre	✓
2026 Brown/Turret	✓
2153 Grey/Shield	✓
✓ Delivery within 24-48 hours	

Bark/Aegis



2118
Dark grey/Castle




2019
Dark blue/Zaffre


Stack/Rampart




2118
Dark grey/Castle




2019
Dark blue/Zaffre




2026
Brown/Turret



2153
Grey/Shield





2026
Brown/Turret




2153
Grey/Shield

*all dimensions are approximate dimensions


Royal is a luxurious entrance mat that meets the increasing demand for a spacious mat that contributes to a welcoming entrance even in severe conditions - such as rain and snow. A bulky entrance mat that keeps the hospitality industry, high-end retail and representative offices clean and safe.

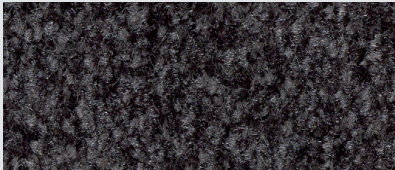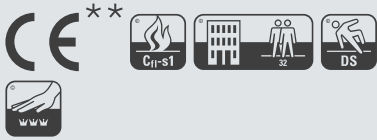


3401 anthracite

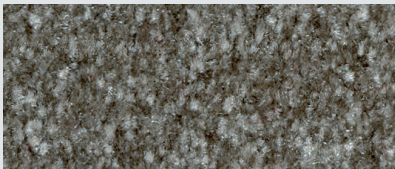

3411 beige

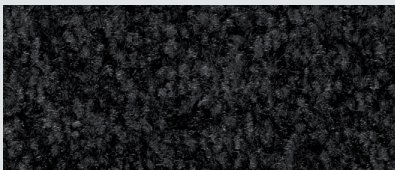

3451 black

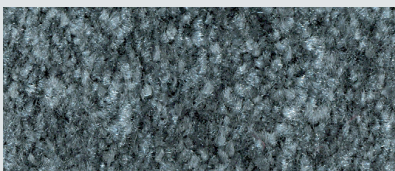

3481 grey



3491 red

Royal

fine dirt and wet coverings for indoor use

Haymon Carpet



Technical Data*

Construction	tufted, velour
Pile material	PA
Pile weight	1400 g/m ²
Pile height	8 mm
Total height	10 mm
Back	PVC (PVC free on request)
Total weight	4200 g/m ²
Wear resistance	class 32
Fire resistance class	Cfl-s1
Comfort class	LC3
Sizes	cut, roll



Delivery	Variable length* (incl. edge lengthways)	Roll* (incl. edge lengthways)	
	200 cm lane	135 cm x 20 m	200 cm x 20 m
Art. Nr.	OS 34-200-Z	OS 34-135-R	OS 34-200-R
3401 anthracite	✓		
3411 beige	✓		
3451 black	✓	⊕ all colours 20-25 business days	⊕ all colours 10-15 business days
3481 grey	✓		
3491 red	✓		

✓ Delivery within 24-48 hours
 ⊕ Delivery within 10-15/20-25 business days

*all dimensions are approx. dimensions
 **does not apply to fitted carpets and loose mats

Coral® Interior

fine dirt and wet coverings for indoor use




FLOORING SYSTEMS



A unique floor concept for the area behind the entrance such as lounges, corridors and elevator rooms. The Coral Interior colors are on all other Coral products coordinated and perfectly match the colors around your door. Coral Interior will be delivered in a box with 6 planks (100 x 25 cm) and 6 tiles (50 x 50cm). A pattern is not necessary: the planks and tiles can be laid in any way and always result in a beautiful floor design!

- mixture of planks and tiles for the ultimate random effect
- easy and quick installation
- unique product for entrance and traffic zones

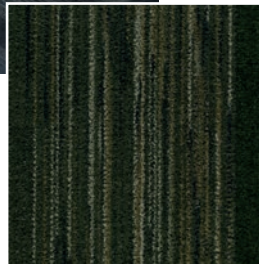


Technical Data*

Construction	tufted, velour
Pile material	ECONYL® regenerated PA
Pile weight	970 g/m ²
Pilke height	6 mm
Total height	10 mm
Back	Everfort® vinyl, phthalate free
Total weight tiles	4150 g/m ²
Fire resistance class	Bfl-s1
Sizes	plank (100 cm x 25 cm), tile (50 cm x 50 cm) 6 planks AND 6 tiles per box (3 m²)



Delivery	PU = 1 box (6 planks AND 6 tiles per box)
Art. Nr.	CO 15-100--0
all colours according to colour chart	⬇
⬇ delivery within 10-15 business days	

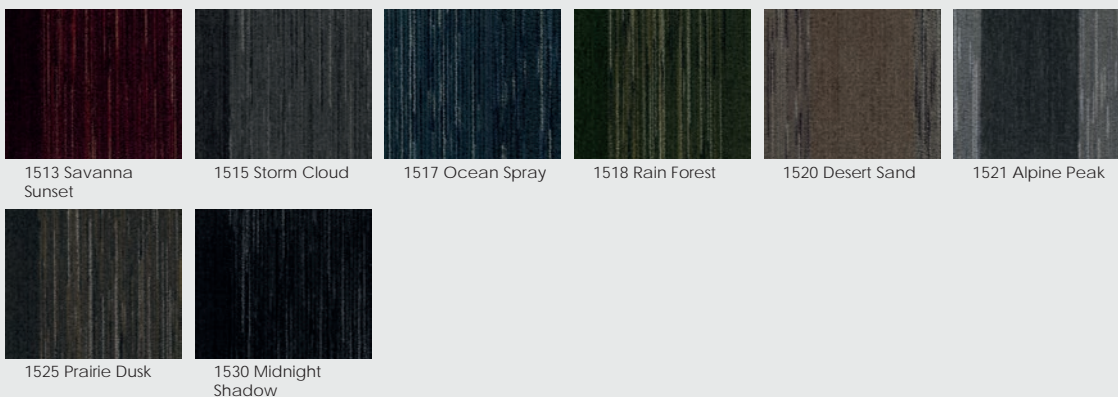

*all dimensions are approximate dimensions






Aluminium mats

Duplomat is unique in its category. Due to the strong connection between rubber and aluminum, this entrance mat is versatile and is ideal for entrances with a lot of (rolling) traffic. It is also accessible for forklifts. Duplomat is made in sheets.


Colours

EPDM rubber



black

Brushes only for 18 mm profile height (Nylon 6.6)




black




dark grey



light grey




brown




yellow




kokos



dark green




green




mint




blue




dark red



red



orange



purple




white




light blue

Velour



grey



black



zebra

Duplomat

fine dirt and wet coverings for indoor use
coarse dirt covering for outdoor use



Technical Data*

Profile height	12 mm, 18 mm
Aluminium width	30 mm
Profile connector	2,5 mm galvanized steel cable
Fire resistance class	Rubber Dfl-s1 Brush, Velour Cf-s1
Slip resistance	Rubber, Velour R11 Brush R13
Optional	mixed brushes (chameleon)
Sizes	made to measure
Optional inlays	single, double

open,
5 mm spacing



closed





double



*all dimensions are approximate dimensions


Econo Heavy MIX

fine dirt and wet flooring for indoor use

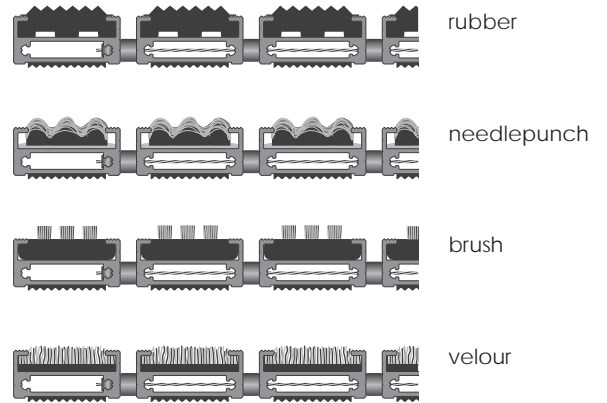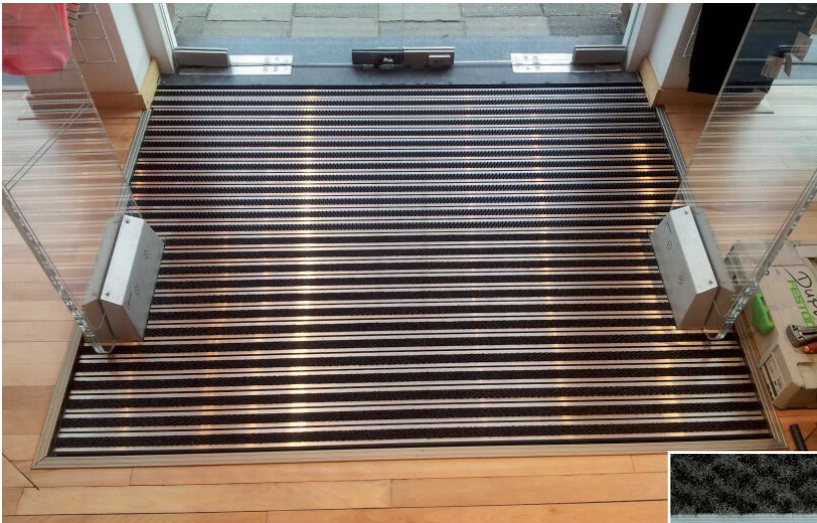


Technical Data*

Profile height	12 mm, 15 mm, 18 mm, 21 mm deluxe 18 mm
Profile spacing	4 mm
Aluminium height	1,15 mm reinforced (2.5 mm) with a profile height of 21 mm deluxe 1,75 mm
Total height	rubber 15 mm, 18 mm, 21 mm, 24 mm needlepunch 15 mm, 18 mm, 21 mm, 24 mm brush 17 mm, 20 mm, 23 mm, 26 mm velour 14 mm, 17 mm, 20 mm, 23 mm deluxe 20 mm (profile width 50 mm)
Profile connectors	2 mm stainless steel cable with EPDM spacers
Fire resistance class	rubber Dfl-s1 brush, needlepunch, velour Bfl-s1
Slip resistance	rubber, needlepunch, velour R10 brush R13
Sizes	made to measure
Optional	frame profile made of anodised aluminium, alternating with scratch profile insert




Profil Deluxe




Profil Standard


Examples combinations




deluxe (wide profile) and rubber insert



brush and needle punch



rubber and brush



reinforced special profile (on request)

*all dimensions are approximate dimensions






Artificial turf

This artificial grass not only looks like natural grass, it also feels like it. The entire range is produced in Europe - this not only saves transport routes, but you can be sure that the lawn will meet all European standards meets quality standards. The high-quality artificial grass offers an attractive and inviting look all year round! Opt for artificial grass in problematic areas where natural grass does not grow!

Accessories



tape



anchor
13 cm, 20 cm



underlay rubber



underlay fleece 150g



All Season Glue/
1 component glue

Artificial turf

high quality landscape grass



Korfu



Capri



Palermo



Bahama



Styx



Palma



Gran Canaria



Madeira Eco

Dimensions					Variable length*		Roll*	
					200 cm lane	400 cm lane	200 cm ca. 25 m	400 cm ca. 25 m
Product	Colour	Back	Height	Art. Nr.				
Korfu	green	latex	25 mm	CG 25-01-400-Z	✓	✓	⊕	⊕
Capri	green	latex	28 mm	CG 28-01-400-Z	✓	✓	⊕	⊕
Palermo	green	latex	30 mm	CG 30-01-400-Z	✓	✓	⊕	⊕
Bahama	green	latex	26 mm	AV 26-001-400-Z	-	✓	-	⊕
Styx	green	PU	20 mm	OR 20-02-400-Z	-	✓	⊕	⊕
Palma	green	latex	37 mm	AV 37-01-400-Z	-	✓	-	⊕
Gran Canaria	green	PU	37 mm	OR 37-01-400-Z	✓	✓	⊕	⊕
Madeira Eco	green	eco-backing	32 mm	AV 32-01-400-Z	✓	✓	⊕	⊕
Expo Lawn Cft-s1**	green	latex	30 mm	LN 30-01-200/400-R	-	-	⊕	⊕

✓ delivery within 5-10 business days

⊕ delivery within 10-15 business days

Assortment may vary depending on the season

** Expo Lawn only available as roll (200 cm x approx. 25 m, 400 cm x approx. 25 m)


*all dimensions are approximate dimensions

Artificial turf

high quality landscape grass



This artificial grass not only looks like natural grass, it also feels like it. The entire range is produced in Europe - this not only saves transport routes, but you can be sure that the lawn will meet all European standards meets quality standards. The high-quality artificial grass offers an attractive and inviting look all year round! Opt for artificial grass in problematic areas where natural grass does not grow!



Universal 15

colourful lawn



black



anthracite



beige




gravel




dark green




green



orange



red



blue



white

Stardust


two-tone lawn




silver



anthracite




grey



black




lime



white




blue




pink



purple



sand



brown

Where artificial grass has previously been used to create a continuous green and beautiful lawn, there is now a solution that combines the best of both worlds. The full, green expression of artificial grass and the unprocessed feeling of natural grass are combined in this product.

Green Hybrid grass is rolled out over the natural lawn, which over time means that the natural grass will blend with the artificial grass. Hybrid grass creates a lovely, green look and helps to protect the fragile natural grass to give it the best possible growing conditions.

Accessoires



1)



2)



3)

1) Fall Protection Pad

Now it is finally possible to retain the green element over the vast majority of the playground. Fall Protection Pad 30 mm makes it possible to build a hybrid grass substrate with a critical fall height up to a full 2.7 m. Fall Protection Pad 30 mm is laid out underneath our Green Hybrid 22, after which the grass will grow through and provide a perfect combination of a natural-looking, soft and safe surface as well as optimal drainage.

2) Needle and thread

The sewing needle and sewing thread are used for installing our Green Hybrid products if you need to join two rolls. The sewing thread is provided in spools of 20 metres in length. The material is extremely strong cross-woven polyester of thickness 1.5 mm. The colour is black.

3) Pins 10 cm, 15 cm



The pins are used to install the Fall Protection Pad in combination with the Green Hybrid system. They are also used when the soil is particularly loose and when installing Green Hybrid products need stronger pins.

Pins, needle and thread are already included in the price.


Images and text by Nordic Lawn

Hybrid grass


protects and stabilizes the natural grass

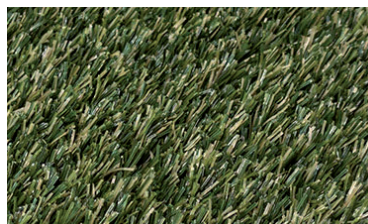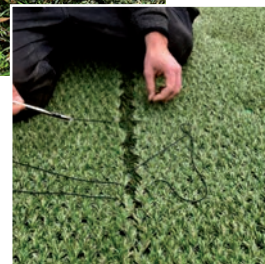


Green Hybrid 22

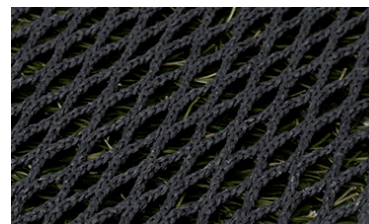


Green Hybrid 22
back

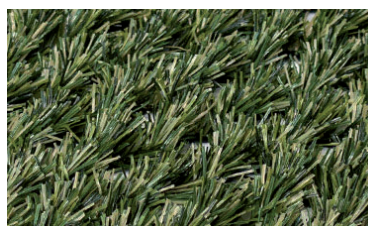

Green Hybrid 32

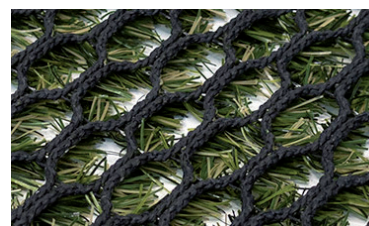

Green Hybrid 32
back

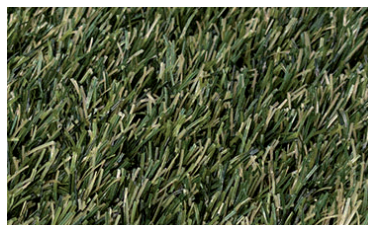

Green Hybrid 32+



Green Hybrid 32+
back

Sport grass/SkiGrass

high quality sports turf



When it comes to sports, lawns are particularly demanding. It is often unavoidable that holes appear in many places, which have to be planted again. Save yourself the hassle - our sports turf is especially for the high loads in football, tennis, golf and much more designed. Since the transport of sand is very expensive due to the weight, we recommend buying the sand locally.

SkiGrass

Many know the problem, the entrance to the lift is often a challenge for sports enthusiasts. Since everyone drives to the same place at the lifts, gondolas and mountain railways to the entry point, the snow disappears just as quickly as it came. Dirt and stones scratch the underside of skis, snowboards. SkiGrass leaves no traces on your winter sports equipment and stays in place for several seasons!



tennis



padel



golf



football




crossfit



playground



multifunktion



SkiGrass



All sports turfs are available as rolls. Cuts on request.

Sortiment kann saisonbedingt variieren



Traugott

Schmutzfang : Funktionsbeläge : Objektbeläge

Georg Traugott GmbH • Feldstraße 1 • 6020 Innsbruck
+43 (0) 512/29 12 66 • office@traugott-tirol.at

We assume no liability for the correctness of the information.
Misprints and changes reserved.